**IMPORTANT MANUAL** **DO NOT THROW AWAY**

# Poulan PRO

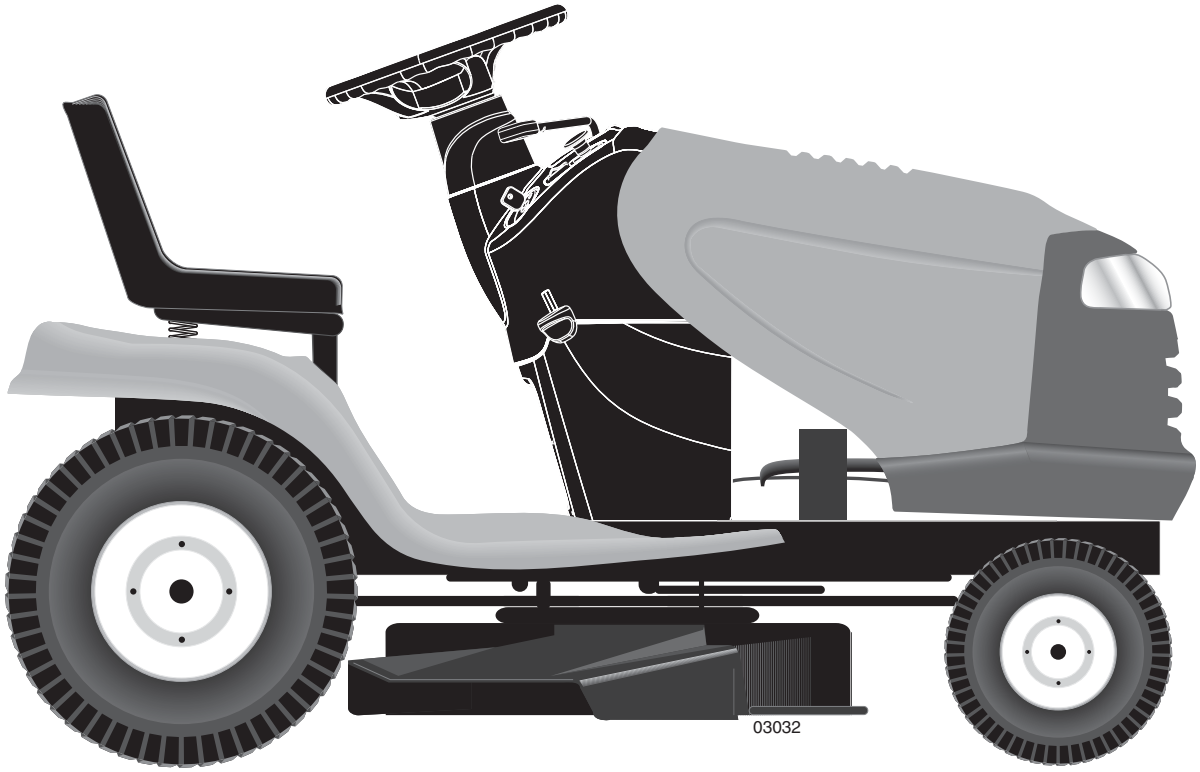


## REPAIR PARTS MANUAL

## MODEL:

# PB26H54YT

## LAWN TRACTOR

**⚠ WARNING:**

**Read this Manual and follow all Warnings and Safety Instructions. Failure to do so can result in serious injury.**

**ALWAYS WEAR EYE PROTECTION DURING OPERATION**

**Visit our website: www.poulanpro.com**

532 44 51-50

07.28.11 BD
Printed in the U.S.A.

# HOW TO USE THIS MANUAL

This manual is designed to provide the customer with a means to identify the parts on his/her tractor when ordering repair parts. The illustrations may or may not represent the actual assemblies; therefore, it is not recommended to use this manual as a guide to assemble or disassemble the tractor. Some hardware and parts are drawn larger in order to more readily identify them.

Each tractor has its own model number.

The model number for your tractor can be found on the fender under the seat.

When ordering parts, always give the following information:

- Product - “TRACTOR”
- MODEL NUMBER - “**PB26H54YT** (**96042012702**)”
- Part Number
- Part Description

# TABLE OF CONTENTS


**SCHEMATIC ..... 3**
**ELECTRICAL ..... 4-5**
**CHASSIS ..... 6-7**
**DRIVE ..... 8-9**
**ENGINE ..... 10-11**
**STEERING ..... 12-13**
**MOWER DECK ..... 14-15**
**MOWER LIFT ..... 16**
**SEAT ..... 17**
**DECALS ..... 18**
**WARRANTY ..... 19**
**PARTS AND SERVICE ..... 20**

# TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
## SCHEMATIC

SCH12

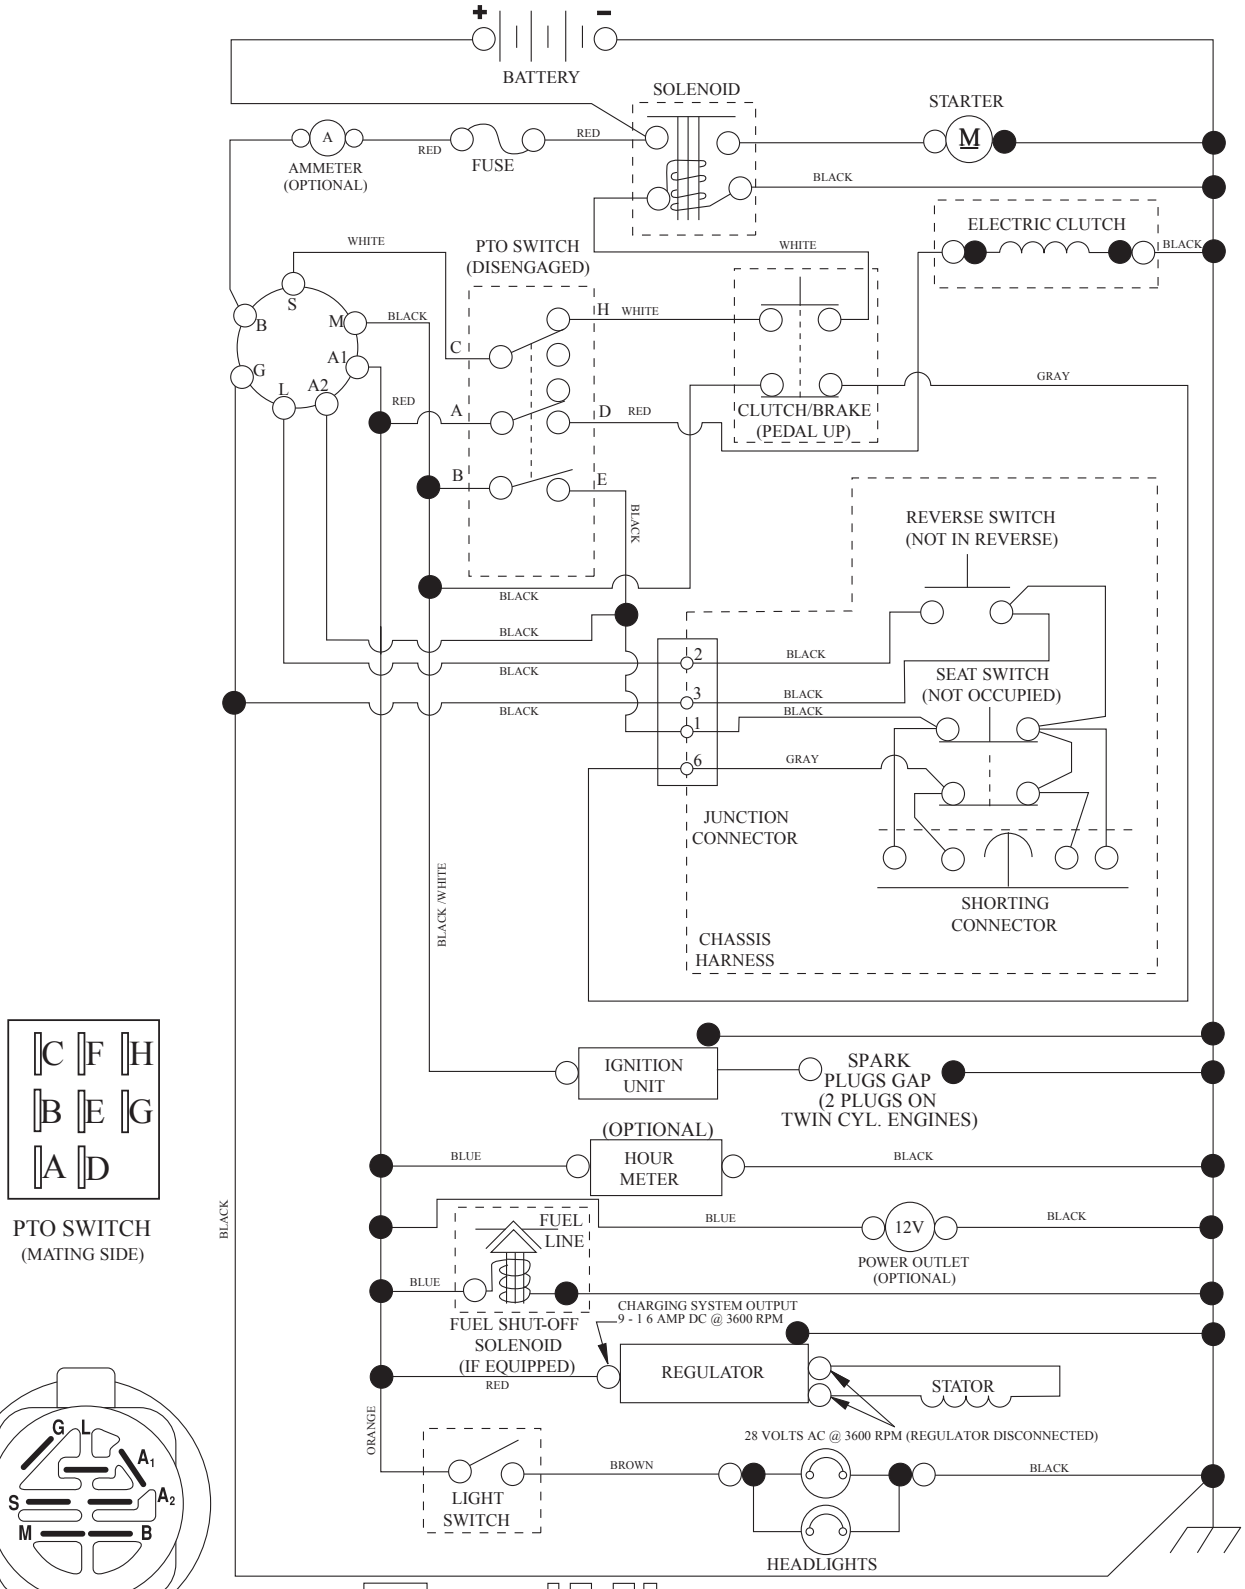





PTO SWITCH
(MATING SIDE)




IGNITION SWITCH

| POSITION | CIRCUIT | "MAKE" |
|---|---|---|
| OFF | M+G+A1 | |
| RUN/OVERRIDE | B+A1 | |
| RUN | B+A1 | L+A2 |
| START | B + S + A1 | |




CHASSIS HARNESS CONNECTOR (MATING SIDE)




DASH HARNESS CONNECTOR

WIRING INSULATED CLIPS
NOTE: IF WIRING INSULATED CLIPS WERE REMOVED FOR SERVICING OF UNIT, THEY SHOULD BE RE-INSTALLED TO PROPERLY SECURE YOUR WIRING.

NON-REMOVABLE CONNECTIONS

REMOVABLE CONNECTIONS

**TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27**
**ELECTRICAL**

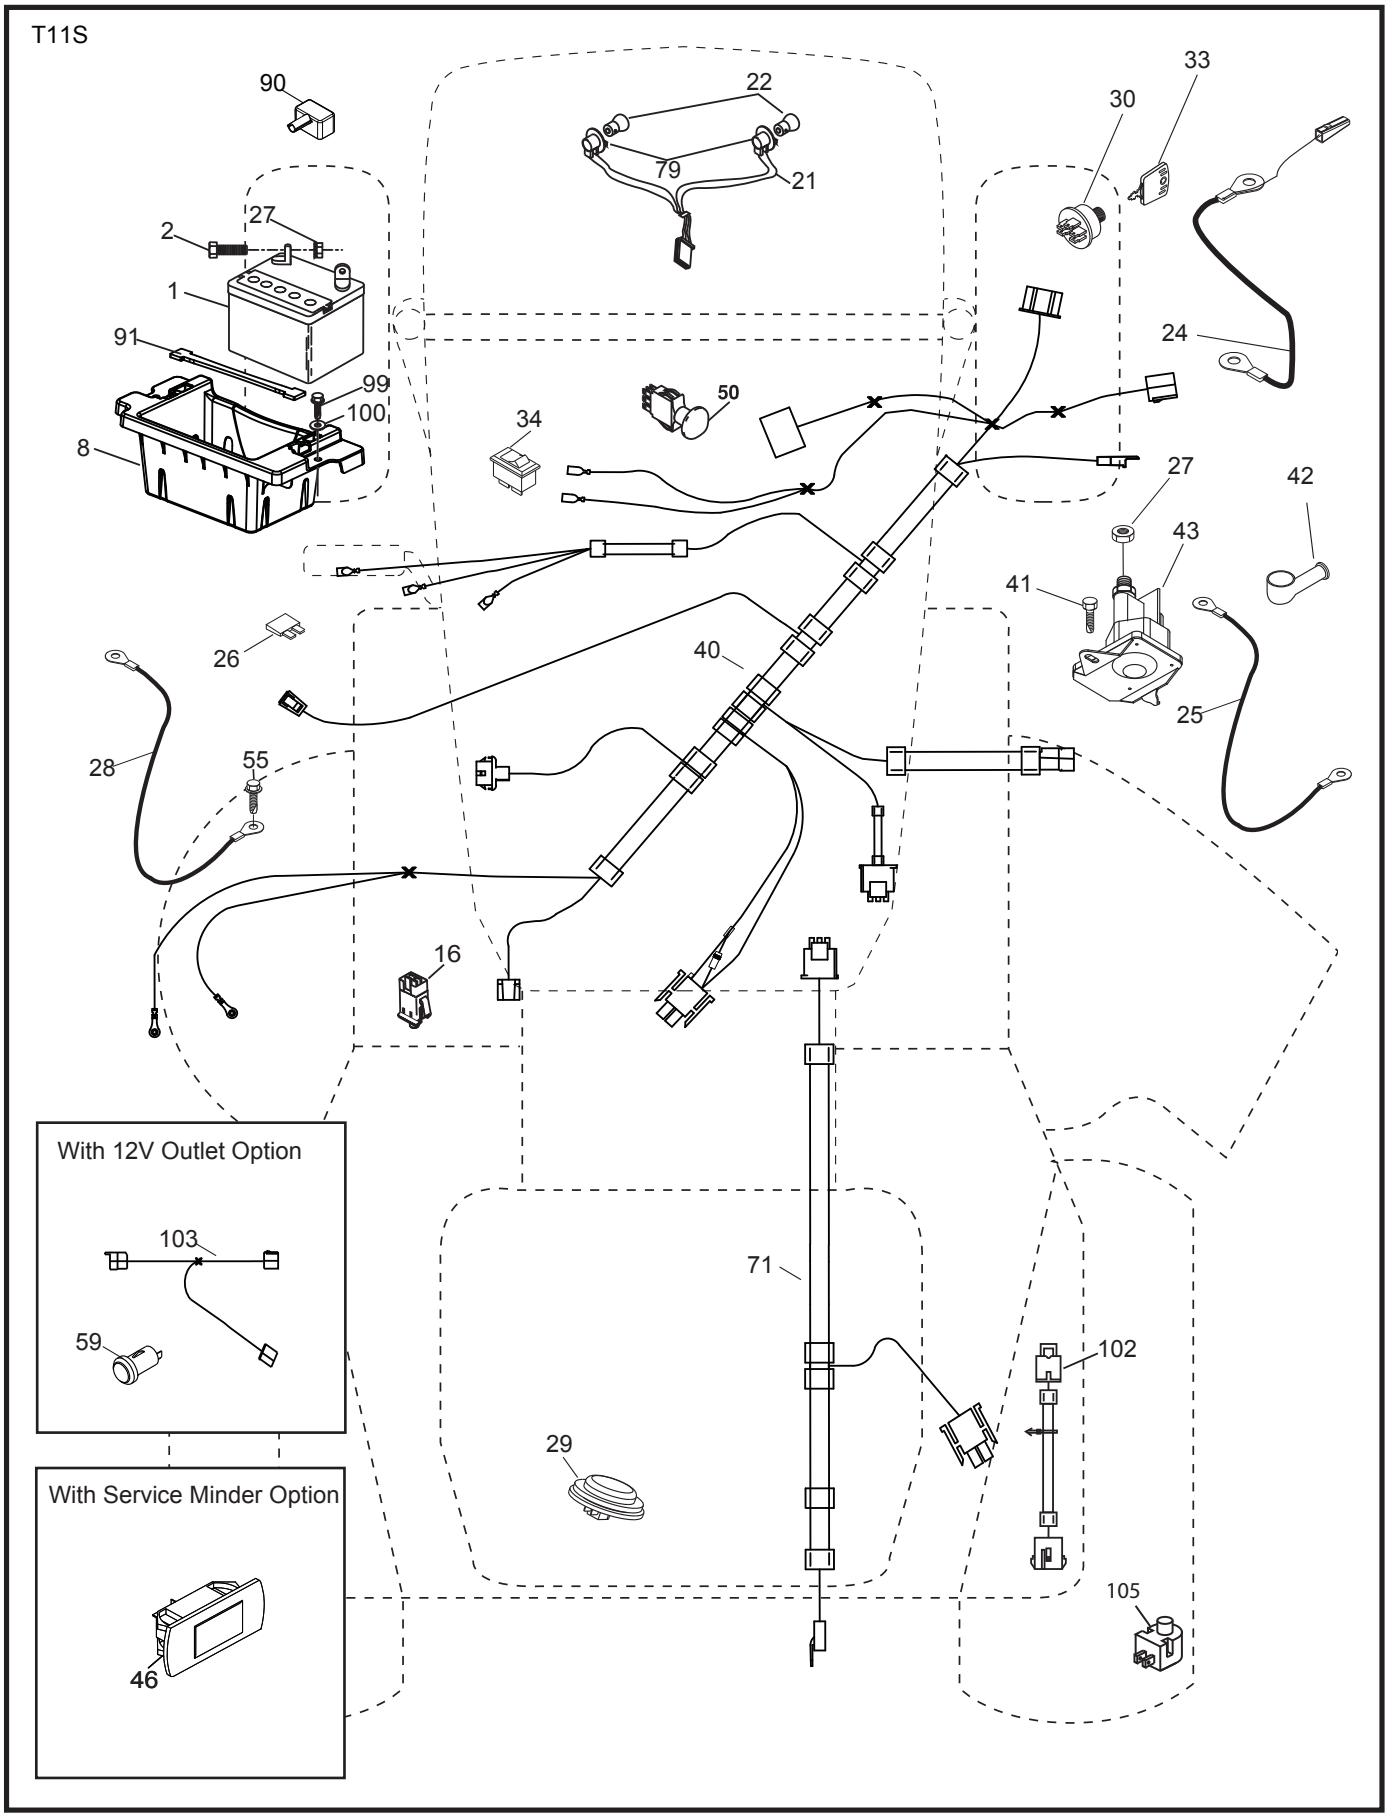

## TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
## ELECTRICAL

| KEY NO. | PART NO. | DESCRIPTION |
|---|---|---|
| 1 | 532 16 34-65 | Battery |
| 2 | 874 76 04-12 | Bolt Hex Head 1/4-20 x 3/4 |
| 8 | 532 18 64-91 | Box Battery |
| 16 | 532 17 61-38 | Switch Interlock Push-In |
| 21 | 532 18 37-59 | Harness Socket Light w/4152J |
| 22 | 532 00 41-52 | Bulb Light |
| 24 | 532 40 02-53 | Cable Battery |
| 25 | 532 41 28-94 | Cable Starter |
| 26 | 532 17 51-58 | Fuse |
| 27 | 873 51 04-00 | Nut Keps Hex 1/4-20 unc |
| 28 | 532 14 54-91 | Cable, Ground |
| 29 | 532 40 15-45 | Switch, Seat |
| 30 | 532 19 33-50 | Switch, Ignition |
| 33 | 532 41 19-33 | Key/Chain |
| 34 | 532 11 07-12 | Switch Light/Reset |
| 40 | 532 40 11-04 | Harness Ignition Dash |
| 41 | 817 72 04-08 | Screw Thd Cut 1/4-20 x 1/2 |
| 42 | 532 13 15-63 | Cover, Terminal |
| 43 | 532 19 25-07 | Solenoid |
| 46 | 532 40 17-63 | Gauge SRVCMNDR HRMTR |
| 50 | 532 17 46-51 | Switch PTO |
| 55 | 817 06 05-12 | Screw Thdrol 5/16-18 x 3/4 TYTT |
| 71 | 532 19 42-76 | Harness Ignition |
| 79 | 532 17 52-42 | Socket Asm Bulb Twistlock |
| 90 | 532 43 53-95 | Cover Terminal Battery |
| 91 | 532 19 02-70 | Strap Battery |
| 99 | 817 67 04-12 | Screw 1/4-20 x 3/4 |
| 100 | 819 09 14-16 | Washer 9/32 x 7/8 x 16 |
| 102 | 532 40 44-54 | Harness Pigtail |
| 105 | 532 40 75-68 | Switch Reverse |

**NOTE:** All component dimensions given in U.S. inches
1 inch = 25.4 mm

# TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
## CHASSIS

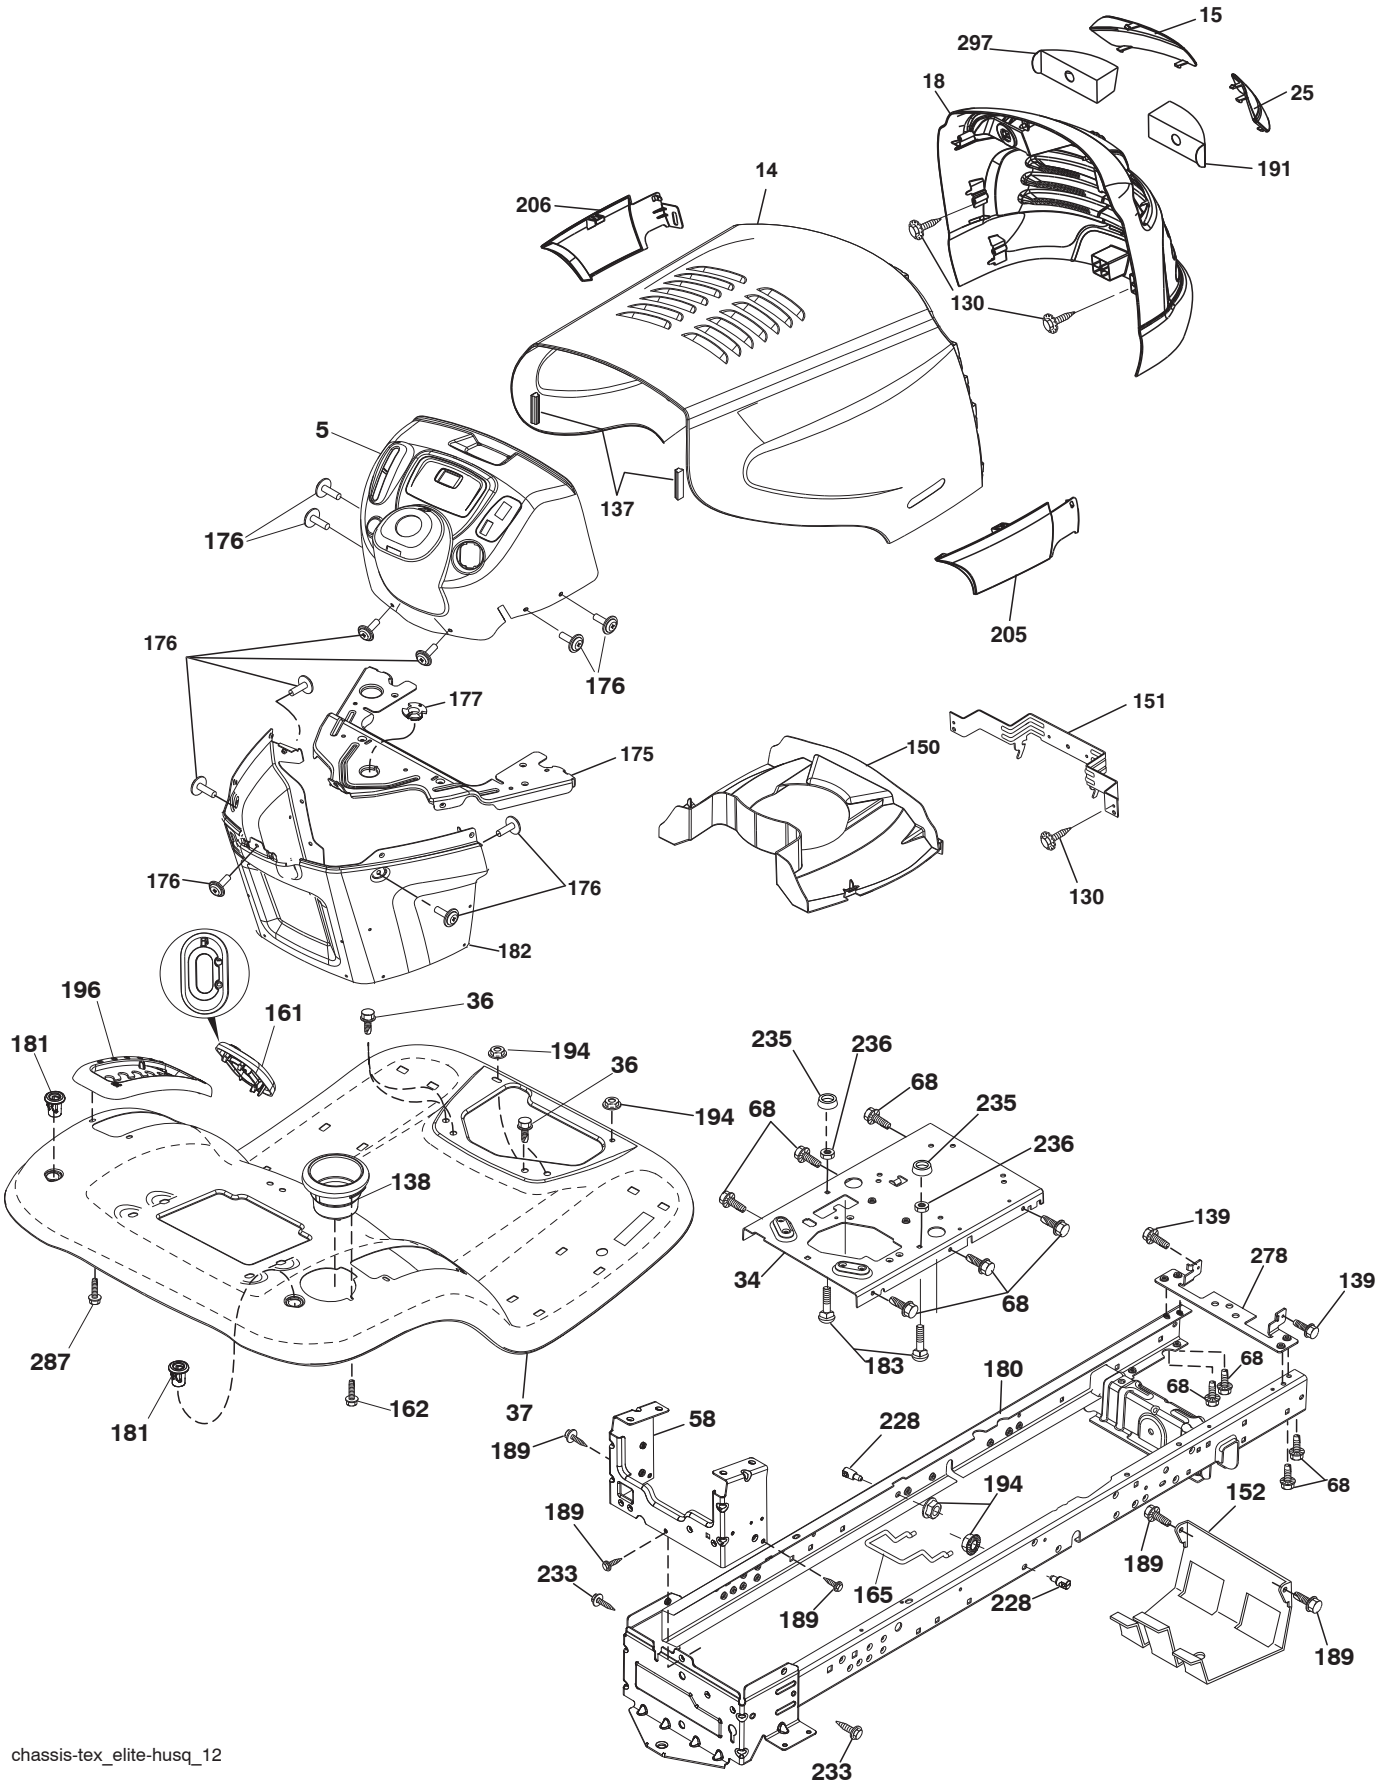


chassis-tex_elite-husq_12

## TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
## CHASSIS

| KEY NO. | PART NO. | DESCRIPTION |
|---|---|---|
| 5 | 532 43 63-86 | Dash |
| 14 | 532 43 63-82 | Hood |
| 15 | 532 18 99-82 | Lens Grille LH |
| 18 | 532 43 27-78 | Grille |
| 25 | 532 18 99-81 | Lens Grille RH |
| 34 | 532 19 61-25 | Plate Engine |
| 36 | 817 06 05-12 | Screw 5/16-18 x 3/4 |
| 37 | 532 43 63-87 | Fender |
| 58 | 532 41 22-80 | Drawbar Upper |
| 68 | 817 49 05-08 | Screw THDROL 5/16-18 x 1/2 |
| 130 | 532 41 63-58 | Screw #10 x 0.750 BOS Thread |
| 137 | 532 18 49-21 | Bumper Hood |
| 138 | 532 40 97-30 | Cupholder |
| 139 | 532 17 18-73 | Shoulder Bolt |
| 150 | 532 43 09-61 | Duct Heat Hood |
| 151 | 532 40 78-07 | Bracket Pivot |
| 152 | 532 19 95-35 | Shield Browning/Debris |
| 161 | 532 41 20-72 | Window Fuel |
| 162 | 532 14 24-32 | Screw Hex Wsh Hi-Lo 1/4 x 1/2 unc |
| 165 | 532 19 68-26 | Support Tank Rear |
| 175 | 532 19 32-43 | Crossmember |
| 176 | 532 40 07-76 | Screw 10-24 x 5/8 Wshd Qdrx |
| 177 | 532 19 52-27 | Bushing Steering |
| 180 | 532 41 50-63 | Chassis |
| 181 | 532 40 47-96 | Bushing Mtg. Fender Crgo. |
| 182 | 532 19 30-57 | Dash Lower |
| 183 | 874 52 05-20 | Bolt Full Thd. 5/16-18 x 1-1/4 |
| 189 | 817 00 05-12 | Screw 5/16-18 x 3/4 |
| 191 | 532 41 65-00 | Insert Lens Reflective RH |
| 194 | 873 90 05-00 | Nut Lock Hex Flange 5/16-18 |
| 196 | 532 41 45-79 | Console Asm. Deck Lift |
| 205 | 532 42 47-47 | Skirt Side RH |
| 206 | 532 42 47-48 | Skirt Side LH |
| 228 | 532 19 51-61 | Stud Fastener |
| 233 | 532 19 65-39 | Bolt Shoulder |
| 235 | 532 40 61-29 | Spacer Fender |
| 236 | 873 93 05-00 | Nut Center Lock 5/16-18 unc |
| 278 | 532 19 63-94 | Bracket Hood/Muffler |
| 287 | 817 60 04-06 | Screw Hex Washead 1/4-20 x 3/8 |
| 297 | 532 18 82-67 | Insert Lens Reflective LH |
| - - | 532 40 09-44 | Kit Bumper (Not Shown) |

**NOTE:** All component dimensions given in U.S. inches
1 inch = 25.4 mm

# TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
## DRIVE

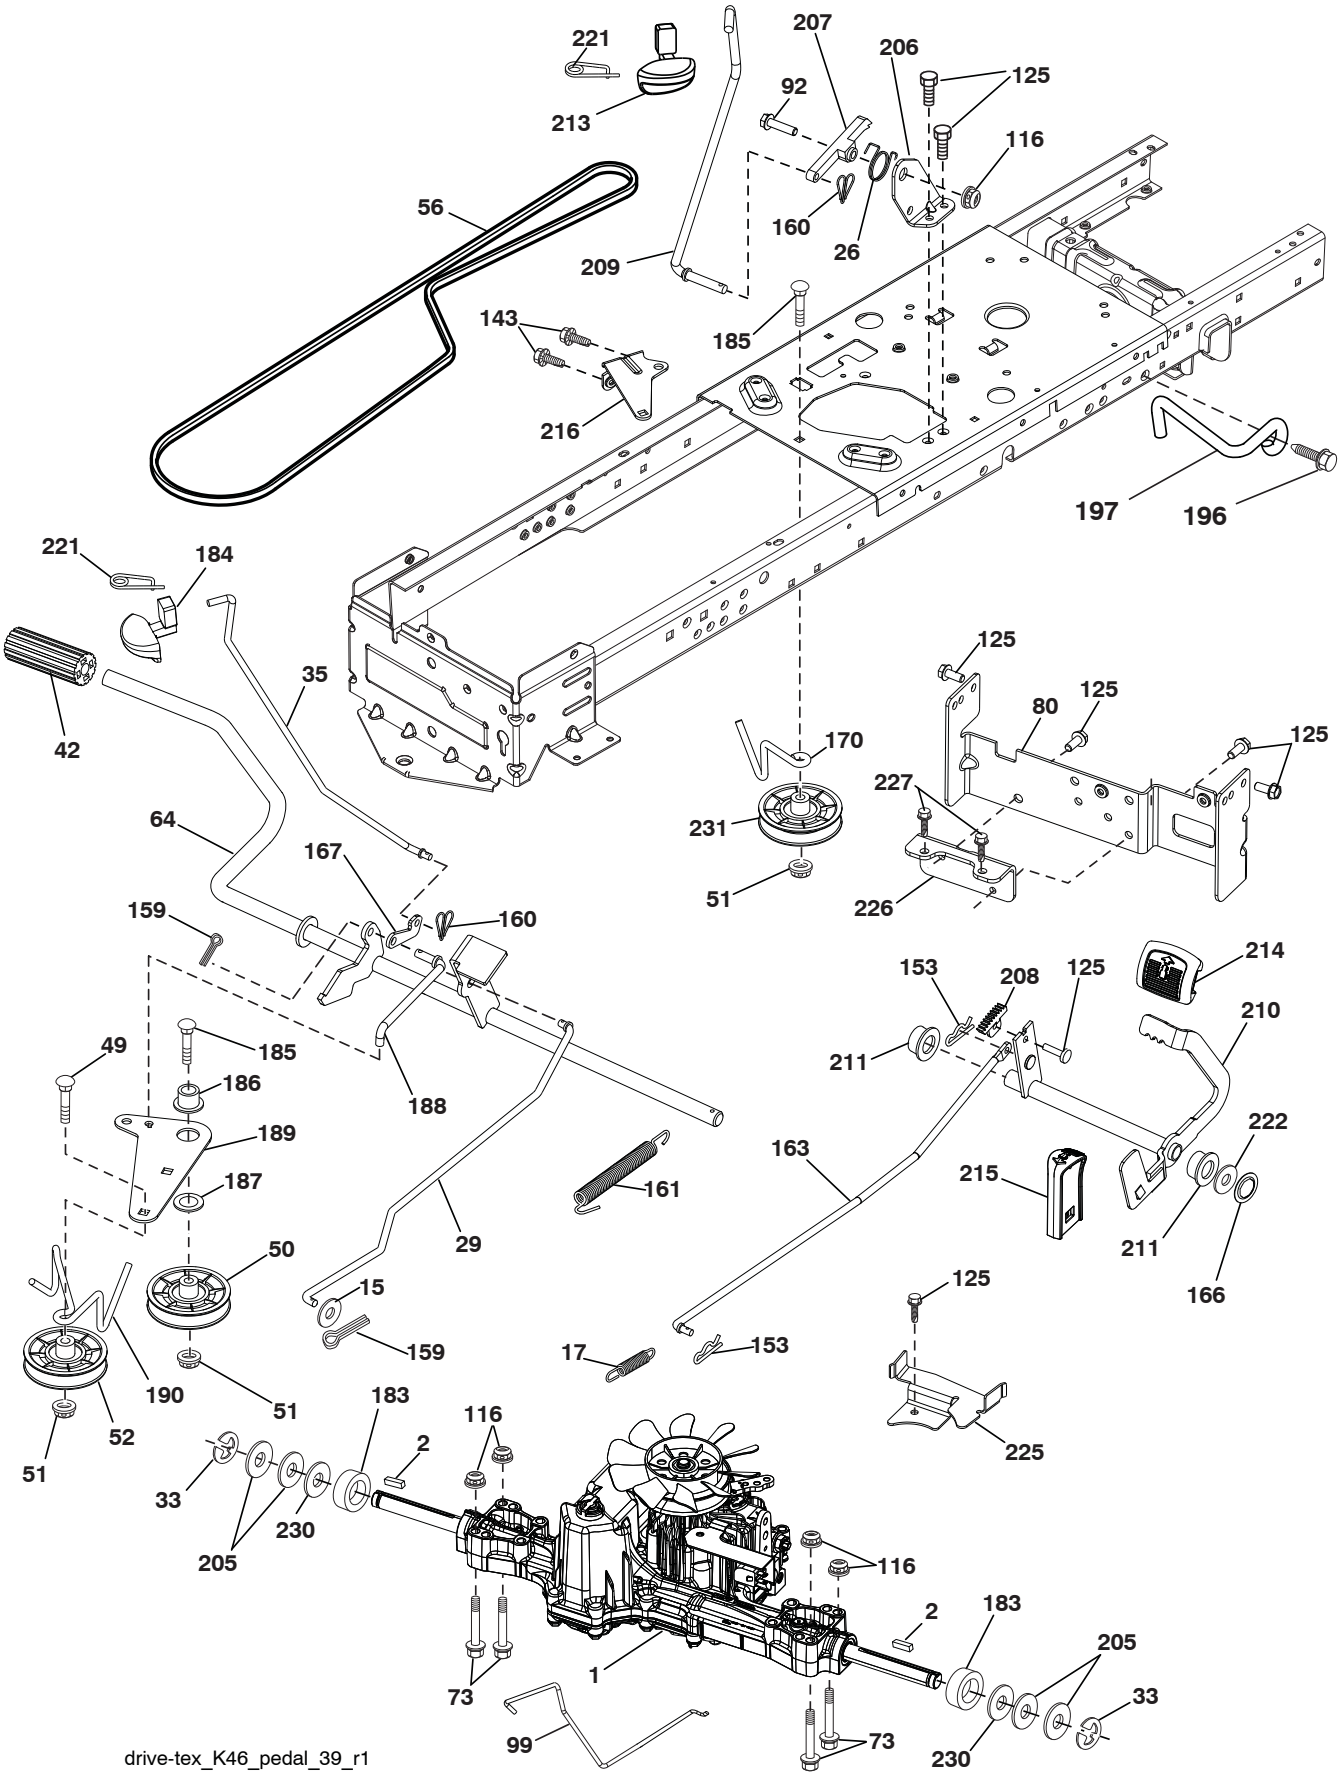

# TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
# DRIVE

| KEY NO. | PART NO. | DESCRIPTION |
|---|---|---|
| 1 | – – – – – – | Transaxle, Tufftorq K46BT (426120)(Order Parts from Transaxle Manufacturer) |
| 2 | 532 12 35-83 | Key |
| 15 | 819 13 13-16 | Washer 13/32 x 13/16 x 16 Ga. |
| 17 | 532 41 36-78 | Spring, Brake |
| 26 | 532 19 96-79 | Spring Return Cruise |
| 29 | 532 40 38-06 | Rod, Brake |
| 33 | 812 00 00-01 | Ring E |
| 35 | 532 19 77-22 | Rod, Brake, Park |
| 42 | 532 12 48-72 | Cover, Foot Pedal |
| 49 | 872 11 06-14 | Bolt |
| 50 | 532 19 43-27 | Pulley Idler Flat |
| 51 | 873 90 06-00 | Lock Nut 3/8-16 |
| 52 | 532 19 43-26 | Idler V-Groove 910" Offset |
| 56 | 532 13 09-69 | V-Belt, Drive |
| 64 | 532 19 78-65 | Shaft Asm. Pedal Brake Control |
| 73 | 874 49 05-40 | Bolt Hex 5/16-18 x 3.75 |
| 80 | 532 44 06-19 | Strap Torque |
| 92 | 874 76 05-20 | Bolt Fin Hex 5/16-18 unc x 1.25 |
| 99 | 532 41 57-42 | Rod Spring Bypass |
| 116 | 873 90 05-00 | Nut Lock Hex Flange 5/16-18 |
| 125 | 817 00 05-12 | Screw 5/16-18 x 3/4 |
| 143 | 817 49 05-08 | Screw 5/16-18 x 1/2 |
| 153 | 532 12 47-88 | Retainer Spring |
| 159 | 876 02 04-12 | Pin Cotter 1/8 x 3/4 |
| 160 | 532 16 94-84 | Retainer Clip |
| 161 | 532 10 57-09 | Spring, Return, Clutch |
| 163 | 532 40 10-34 | Rod Pedal Control |
| 166 | 532 42 91-64 | Nut Push .625 |
| 167 | 532 40 52-57 | Latch Brake Parking |
| 170 | 532 41 34-30 | Keeper Belt Centerspan |
| 183 | 532 13 70-57 | Spacer Axle |
| 184 | 532 44 15-04 | Handle Parking Brake |
| 185 | 872 11 06-22 | Bolt |
| 186 | 532 19 43-21 | Spacer Retainer |
| 187 | 819 13 32-10 | Washer |
| 188 | 532 19 43-23 | Link Clutch Ground Drive |
| 189 | 532 19 43-17 | Bellcrank Ground Drive |
| 190 | 532 19 43-18 | Keeper Bellcrank Ground Drive |
| 196 | 817 00 06-16 | Screw 3/8-16 x 1 |
| 197 | 532 19 58-04 | Link Clutch Anti-Rotation |
| 205 | 532 12 17-48 | Washer 25/32 x 1-5/8 x 16 Ga. |
| 206 | 532 19 78-67 | Bracket Mount Latch Cruise |
| 207 | 532 19 78-68 | Latch Control Cruise |
| 208 | 532 19 78-69 | Gear Sector Control Cruise |
| 209 | 532 40 07-69 | Rod Control Cruise |
| 210 | 532 40 09-80 | Rocker Asm. Pedal Control |
| 211 | 532 12 01-83 | Bearing Nylon |
| 213 | 532 42 47-44 | Knob control Cruise |
| 214 | 532 42 12-63 | Pad Pedal Forward |
| 215 | 532 40 17-23 | Pad Pedal Reverse |
| 216 | 532 19 61-31 | Bracket Pulley Idler |
| 221 | 532 40 31-87 | Retainer Spring Clip Handle |
| 222 | 879 21 20-10 | Washer 21/32 x 1-1/4 10 Ga. |
| 225 | 532 40 33-19 | Keeper Belt Transaxle |
| 226 | 532 40 15-64 | Bracket Mount Torque |
| 227 | 817 49 05-12 | Screw 5/16-18 x 3/4 |
| 230 | 532 18 89-67 | Washer Harden .793 x 1.637 x 060 |
| 231 | 532 40 72-87 | Idler V-Groove |

**NOTE:** All component dimensions given in U.S. inches
1 inch = 25.4 mm

**TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27**
**ENGINE**

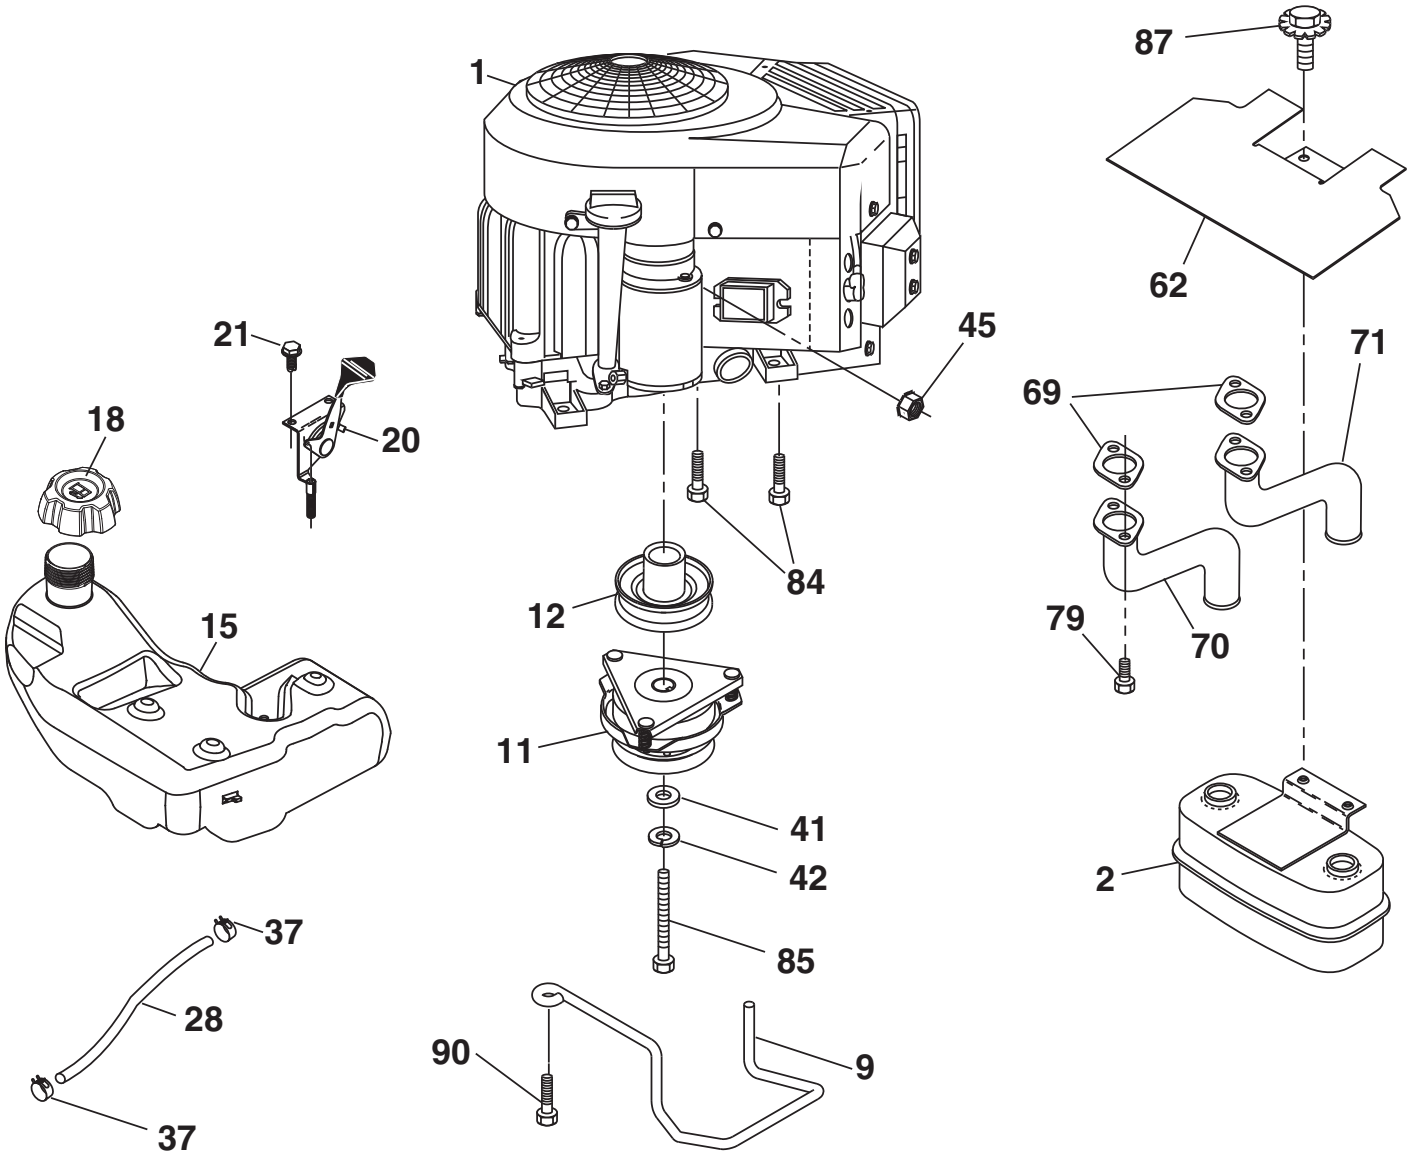


**SPARK ARRESTER KIT**

engine-tex_bs-2cyl_41

# TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
# ENGINE

| KEY NO. | PART NO. | DESCRIPTION |
|---|---|---|
| 1 | – – – – – – | Engine B&S Model No. 44P777-2448-G1 (438239) (Order parts from engine manufacturer) |
| 2 | 532 14 97-23 | Muffler |
| 9 | 532 19 43-20 | Keeper Belt Engine |
| 11 | 532 40 00-08 | Clutch Electric |
| 12 | 532 40 50-97 | Pulley Engine |
| 15 | 532 43 80-80 | Tank Fuel |
| 18 | 532 43 02-14 | Cap Fuel |
| 20 | 532 42 35-02 | Control Throttle/Choke |
| 21 | 532 41 63-58 | Screw #10 x 0.750 BOS Thread |
| 28 | 532 40 11-35 | Fuel Line |
| 29 | 532 13 71-80 | Spark Arrester Kit |
| 37 | 532 12 34-87 | Clamp Hose |
| 41 | 532 12 61-97 | Washer 1-1/2 OD x 15/32 ID x 250 |
| 42 | 810 04 07-00 | Washer Lock 7/16 |
| 45 | 873 51 04-00 | Nut Keps Hex 1/4-20 unc |
| 62 | 532 43 40-17 | Shield Heat Muffler |
| 69 | 532 16 53-91 | Gasket |
| 70 | 532 15 99-55 | Exhaust Tube LH |
| 71 | 532 16 05-89 | Exhaust Tube RH |
| 79 | 532 18 39-06 | Screw Socket HD 5/16-18 x 1 |
| 84 | 817 06 06-20 | Screw 3/8-16 x 1-1/4 |
| 85 | 532 17 39-37 | Bolt 7/16-20 x 4 x Gr. 5-1.5 |
| 87 | 532 17 18-77 | Bolt 5/16 - 18 x 3/4 |
| 90 | 817 00 06-16 | Screw 3/8-16 x 1 |

**NOTE:** All component dimensions given in U.S. inches
1 inch = 25.4 mm

For engine service and replacement parts, call the toll free number for your engine manufacturer listed below:

Briggs & Stratton 1-800-233-3723

**Engine Power Rating Information**

The gross power rating for individual gas engine models is labeled in accordance with SAE (Society of Automotive Engineers) code J1940 (Small Engine Power & Torque Rating Procedure), and rating performance has been obtained and corrected in accordance with SAE J1995 (Revision 2002-05). Torque values are derived at 3060 RPM; horsepower values are derived at 3600 RPM. Actual gross engine power will be lower and is affected by, among other things, ambient operating conditions and engine-to-engine variability. Given both the wide array of products on which engines are placed and the variety of environmental issues applicable to operating the equipment, the gas engine will not develop the rated gross power when used in a given piece of power equipment (actual “on-site” or net power). This difference is due to a variety of factors including, but not limited to, accessories (air cleaner, exhaust, charging, cooling, carburetor, fuel pump, etc.), application limitations, ambient operating conditions (temperature, humidity, altitude), and engine-to-engine variability. Due to manufacturing and capacity limitations, Briggs & Stratton may substitute an engine of higher rated power for this Series engine.

# TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
## STEERING ASSEMBLY

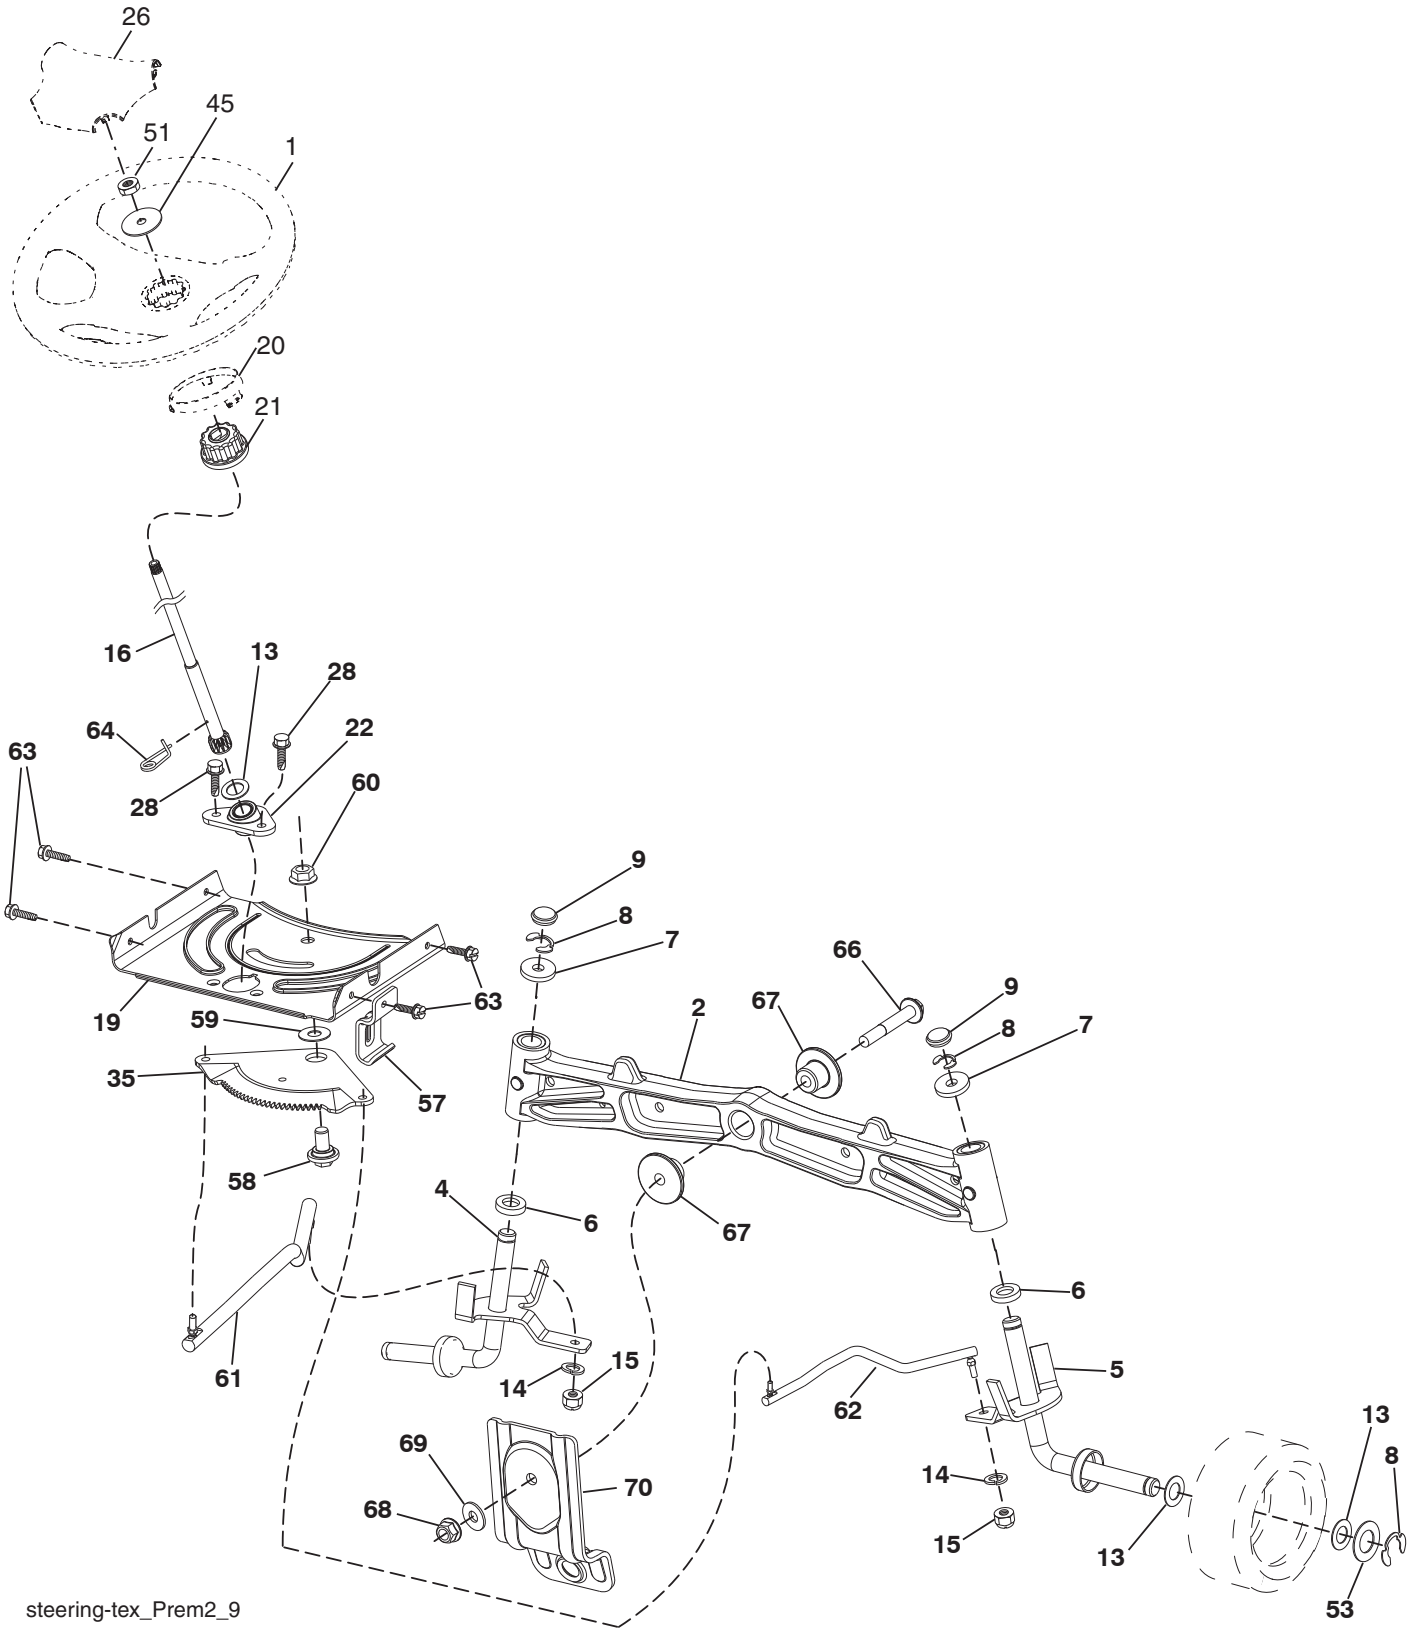

## TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
## STEERING ASSEMBLY

| KEY NO. | PART NO. | DESCRIPTION |
|---|---|---|
| 1 | 532 42 45-51 | Wheel, Steering |
| 2 | 532 19 59-68 | Axle Asm., Front |
| 4 | 532 40 30-87 | Spindle Asm., LH |
| 5 | 532 40 30-88 | Spindle Asm., RH |
| 6 | 532 12 49-31 | Bearing, Race Thrust Harden |
| 7 | 532 12 17-48 | Washer 25/32 x 1-5/8 x 16 Ga. |
| 8 | 812 00 00-29 | Ring, Clip #T5304-75 |
| 9 | 532 12 12-32 | Cap, Spindle |
| 13 | 532 12 17-49 | Washer 25/32 x 1-1/4 x 16 Ga. |
| 14 | 810 04 06-00 | Washer, Lock Hvy Hlcl Spr 3/8 |
| 15 | 873 54 06-00 | Nut, Crown Lock 3/8-24 unf |
| 16 | 532 40 82-19 | Shaft Steering |
| 19 | 532 19 47-29 | Plate Steering |
| 20 | 532 43 27-84 | Boot, Steering |
| 21 | 532 18 67-37 | Adapter, Wheel Steering |
| 22 | 532 42 05-37 | Steering Support Lower |
| 26 | 532 42 45-53 | Insert, Wheel Steering |
| 28 | 817 00 06-12 | Screw 3/8-16 x 3/4 |
| 35 | 532 19 47-32 | Gear, Sector Plate |
| 45 | 819 18 38-12 | Washer 9/16 ID x 2-3/8 x 12 Ga. |
| 51 | 873 94 08-00 | Nut Hex Jam Toplock 1/2-20 unf |
| 53 | 532 18 89-67 | WasherHardened.793x1.637x.060 |
| 57 | 532 19 72-46 | Bracket Upstop |
| 58 | 532 19 47-47 | Bolt Shoulder Sector Pivot CFM |
| 59 | 532 19 47-48 | Washer Thrust Sector Steering |
| 60 | 873 97 10-00 | Nut Flange Lock 5/8-11 |
| 61 | 532 19 47-40 | Draglink, LH |
| 62 | 532 19 47-41 | Draglink, RH |
| 63 | 817 00 05-12 | Screw 5/16-18 x 3/4 |
| 64 | 532 19 98-49 | Retainer Clip Spring Steering |
| 66 | 871 02 07-48 | Bolt Hex Fghd 7/16-14 x 3 Serr |
| 67 | 532 19 47-37 | Bushing PM Front Axle |
| 68 | 873 90 07-00 | Nut Lock Flange 7/16-14 Gr. 5 |
| 69 | 532 19 91-62 | Washer 1.5 x .505 x .118 |
| 70 | 532 19 61-97 | Bracket Deck Susp. Front |

**NOTE:** All component dimensions given in U.S. inches
1 inch = 25.4 mm

# TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
## MOWER DECK

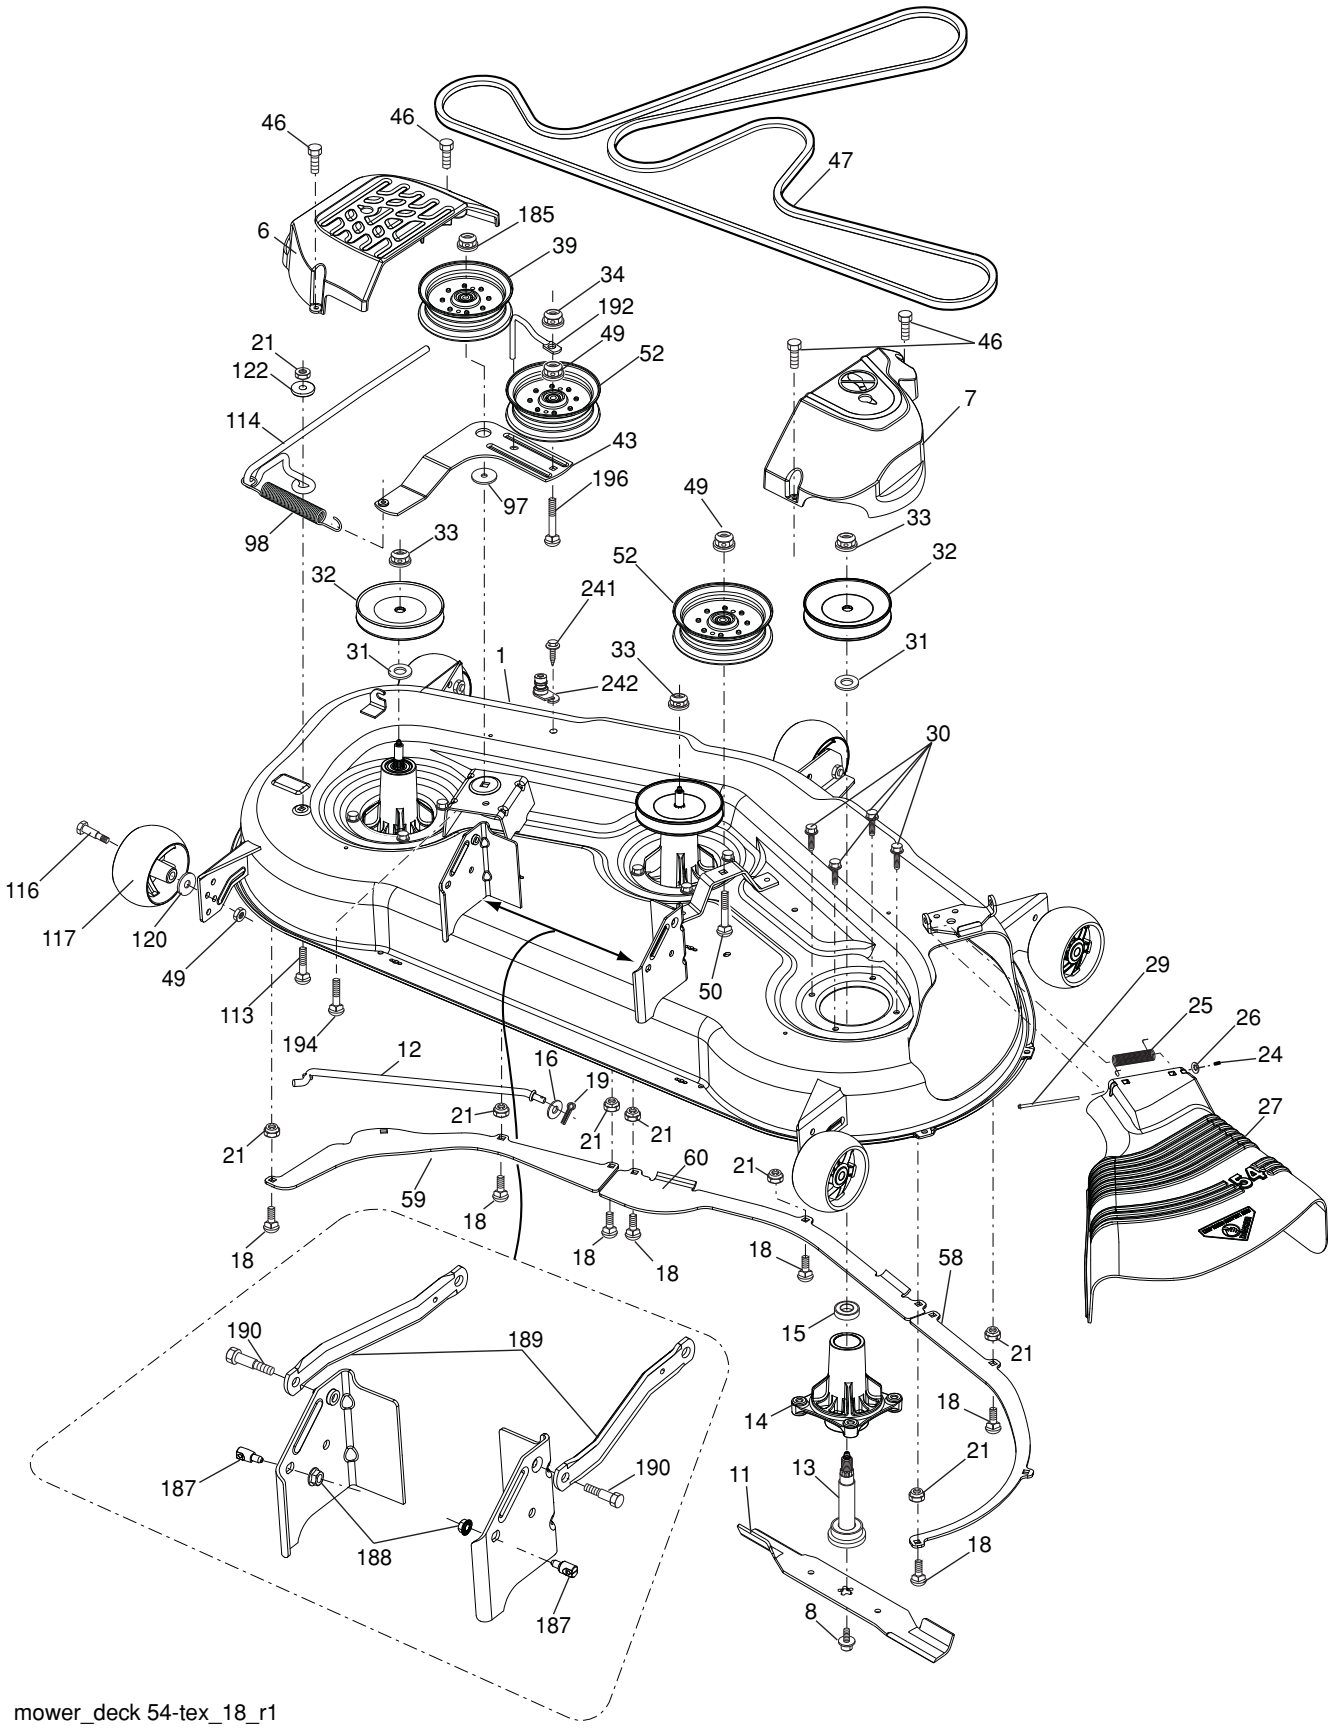


mower_deck 54-tex_18_r1

## TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
## MOWER DECK

| KEY NO. | PART NO. | DESCRIPTION |
|---|---|---|
| 1 | 532 19 56-32 | Deck Weldment Mower |
| 6 | 532 19 60-66 | Cover Mandrel LH |
| 7 | 532 19 71-81 | Cover Mandrel RH |
| 8 | 532 19 30-03 | Bolt 7/16 Asm. Blade |
| 11 | 532 18 72-56 | Blade Bagging |
| 12 | 532 40 48-51 | Rod Anti-Sway |
| 13 | 532 18 72-91 | Shaft Asm. w/Lower Bearing |
| 14 | 532 18 72-81 | Housing, Mandrel |
| 15 | 532 11 04-85 | Bearing, Ball, Mandrel |
| 16 | 819 13 13-12 | Washer 13/32 x 13/16 x 12 Ga. |
| 18 | 872 14 05-05 | Bolt Carr. 5/16-18 x 5/8 |
| 19 | 532 19 42-08 | Pin Cotter 5/16 Bow Tie Lock |
| 21 | 873 68 05-00 | Nut, Crownlock 5/16-18 unc |
| 24 | 532 10 53-04 | Cap Sleeve |
| 25 | 532 17 81-02 | Spring, Torsion |
| 26 | 532 11 04-52 | Nut, Push |
| 27 | 532 18 89-38 | Deflector Shield |
| 29 | 532 13 14-91 | Rod, Hinge |
| 30 | 532 17 39-84 | Screw, Thdroll Washer Head |
| 31 | 532 18 76-90 | Washer, Spacer Mower Vented |
| 32 | 532 15 35-35 | Pulley, Mandrel |
| 33 | 532 40 02-34 | Nut, Flg. Top Lock |
| 34 | 873 68 06-00 | Nut Crownlock 3/8-16 unc |
| 39 | 532 19 73-80 | Pulley, Idler, Stationary |
| 43 | 532 19 60-65 | Arm, Idler |
| 46 | 532 13 77-29 | Screw, Thdroll. 1/4-20 x 5/8 |
| 47 | 532 19 61-03 | V-Belt, Mower |
| 49 | 873 90 06-00 | Nut, Lock Flg. 3/8-16 unc |
| 50 | 872 11 06-16 | Bolt Rdhd Sqnk 3/8-16 unc x 2 |
| 52 | 532 19 73-79 | Pulley Idler 4.50 |
| 58 | 532 18 73-42 | Baffle Right |
| 59 | 532 18 73-44 | Baffle Left |
| 60 | 532 18 76-07 | Baffle Center |
| 97 | 532 17 85-15 | Washer Hardened |
| 98 | 532 19 61-05 | Spring Drive |
| 113 | 872 11 05-08 | Bolt Rdhd Sqnk 5/16-18 x 3/4 |
| 114 | 532 18 75-56 | Rod Tension Relief |
| 116 | 532 19 34-06 | Bolt, Shoulder |
| 117 | 532 17 48-73 | Gauge Wheel |
| 120 | 819 13 20-12 | Washer 13/32 x 1-1/4 x 12 Ga. |
| 122 | 532 18 75-57 | Bushing Tension Relief |
| 185 | 873 90 07-00 | Nut Lock Flange 7/16-14 Gr. 5 |
| 187 | 532 19 51-61 | Stud Fastener w/"D" Anti-Rotation |
| 188 | 873 90 05-00 | Nut Lock Hex Flange 5/16-18 |
| 189 | 532 19 51-85 | Arm Susp. Mower Rear |
| 190 | 532 19 65-39 | Bolt Shoulder |
| 192 | 532 19 84-68 | Keeper Belt Idler |
| 194 | 874 49 07-36 | Bolt Hex Washer Head 7/16-14 x 2.25 |
| 196 | 872 14 06-20 | Bolt Rdhd 3/8-16 unc x 2-3/4 Gr. 5 |
| 241 | 532 15 29-27 | Screw TT #10-32.5 3/8 FLG |
| 242 | 532 41 55-98 | Port Washout |
| - - | 532 41 64-05 | Coupling Quick Disconnect |
| - - | 532 18 72-92 | Mandrel Asm. Service (Includes Key Nos. 13-15 and 33) |
| - - | 532 41 80-76 | Replacement Mower, Complete |

**NOTE:** All component dimensions given in U.S. inches
1 inch = 25.4 mm

## TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
## MOWER LIFT

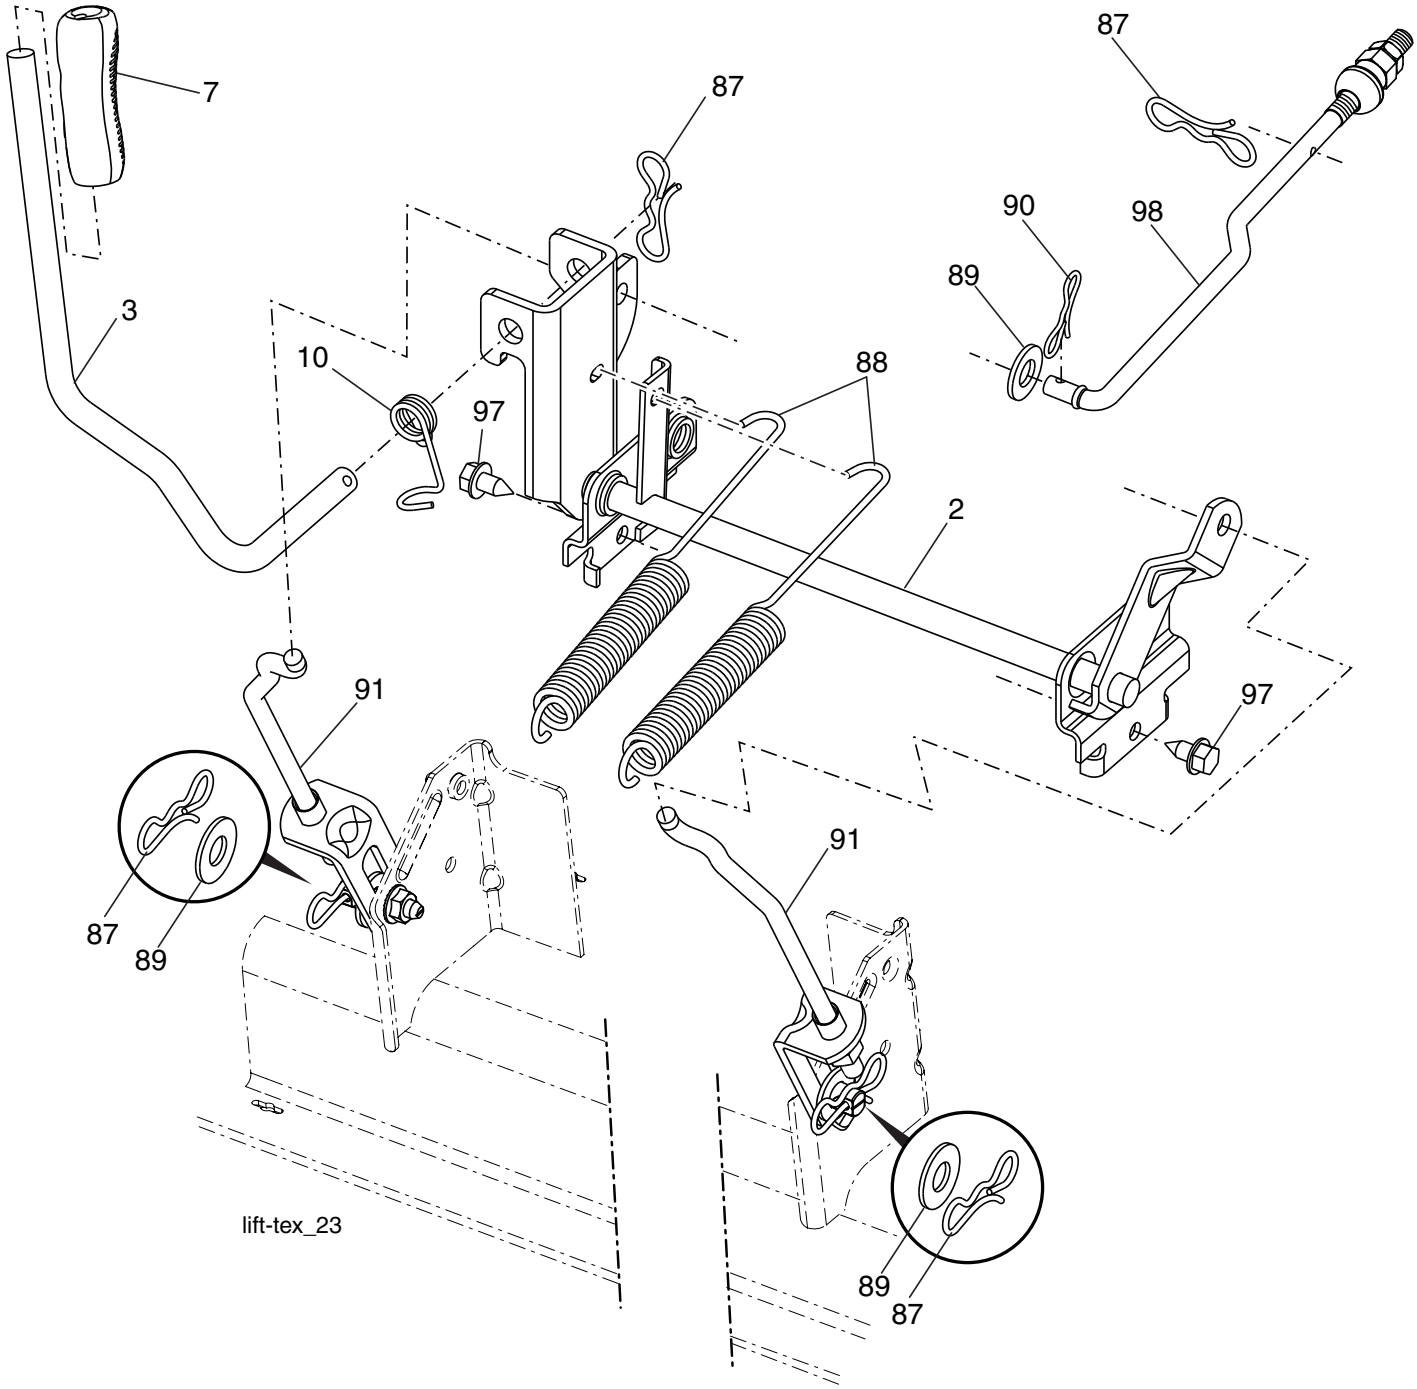


| KEY NO. | PART NO. | DESCRIPTION |
|---|---|---|
| 2 | 532 42 20-27 | Shaft Asm., Lift |
| 3 | 532 19 52-31 | Lever Asm., Lift RH |
| 7 | 532 41 15-55 | Grip, Lever |
| 10 | 532 19 63-14 | Spring Torsion |
| 87 | 532 19 42-09 | Pin Cotter 7/16 Bow Tie Lock |
| 88 | 532 41 07-10 | Spring Lift Assist |
| 89 | 819 19 19-12 | Washer Clear Zinc |
| 90 | 532 19 42-08 | Pin Cotter 5/16 Bow Tie Lock |
| 91 | 532 40 34-07 | Link Asm. Lift Rear |
| 97 | 817 00 06-12 | Screw 3/8-16 x .75 Smgml Tap/R.Z |
| 98 | 532 19 52-64 | Link Lift Susp. Front Mower |

**NOTE:** All component dimensions given in U.S. inches
1 inch = 25.4 mm

## TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
## SEAT ASSEMBLY

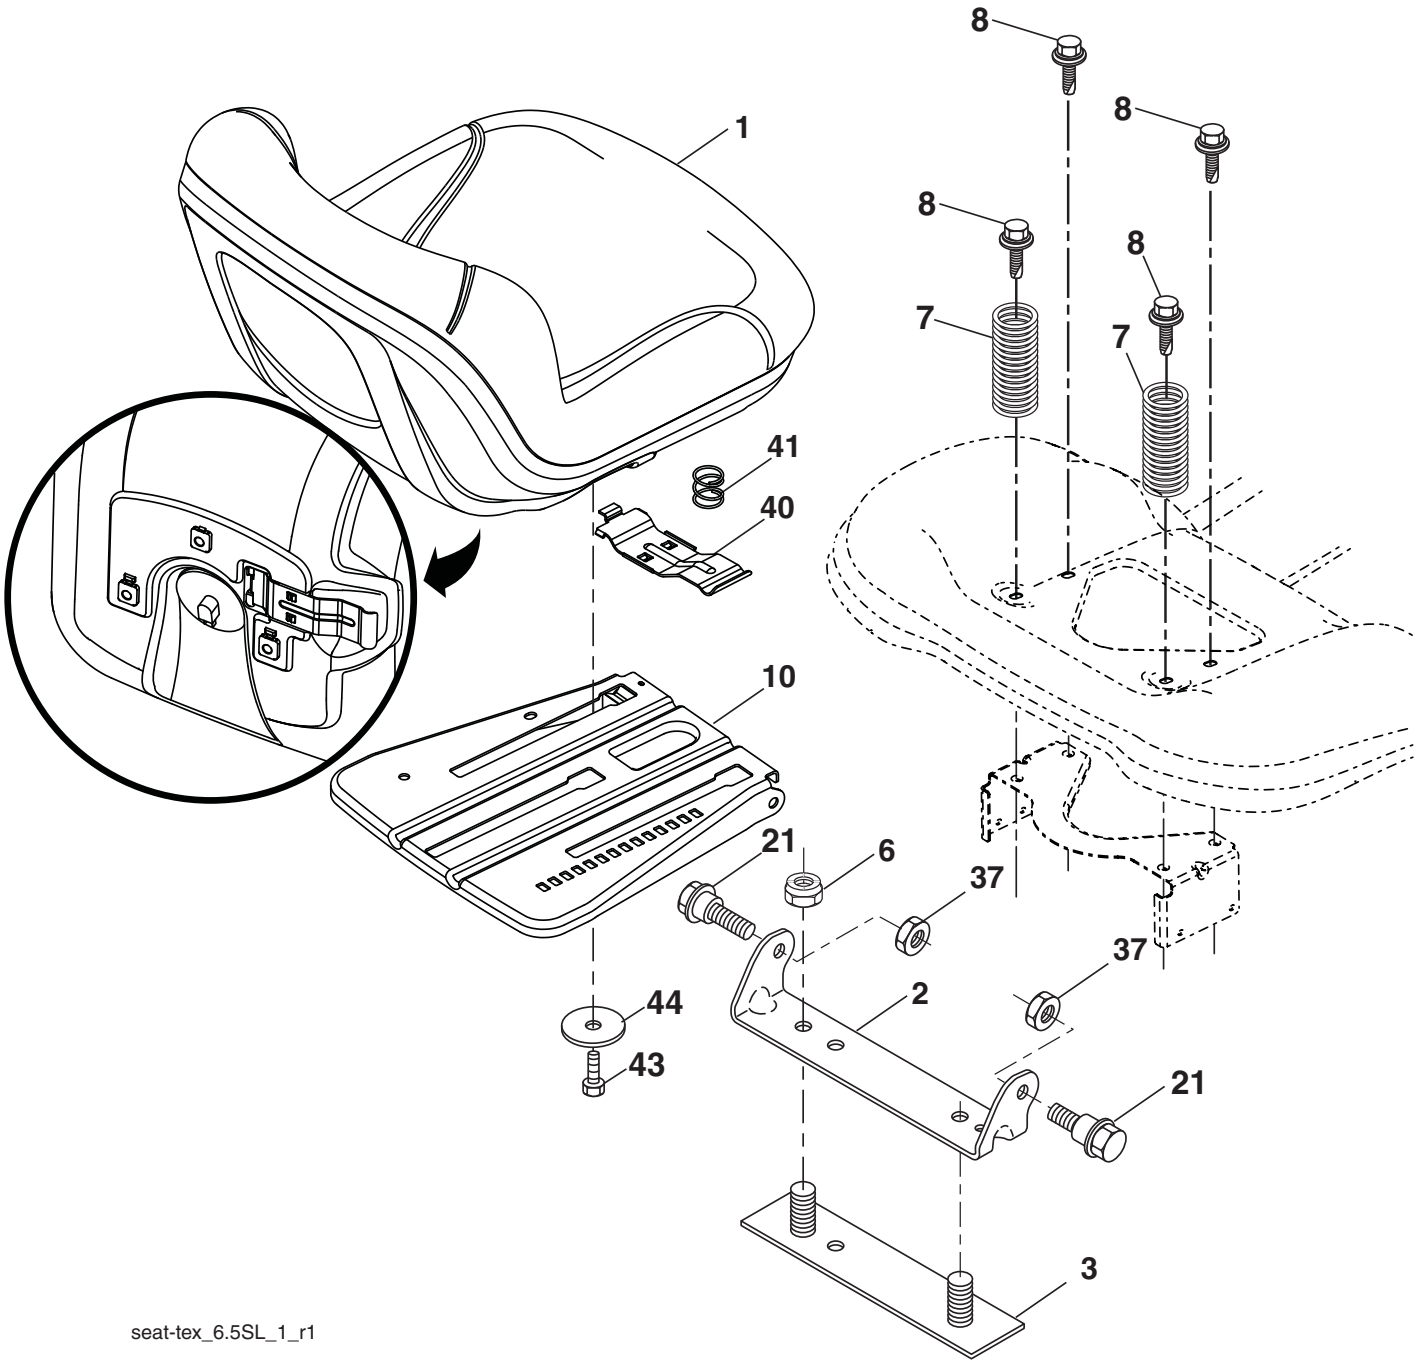


| KEY NO. | PART NO. | DESCRIPTION |
|---|---|---|
| 1 | 532 40 66-23 | Seat |
| 2 | 532 18 01-66 | Bracket Pivot Fender |
| 3 | 532 14 06-75 | Strap, Asm Fender |
| 6 | 873 80 06-00 | Nut, Lock w/Ins. 3/8-16 unc |
| 7 | 532 12 41-81 | Spring, Seat Cprsn |
| 8 | 532 17 18-77 | Bolt 5/16-18 unc x 3/4 w/Sems |
| 10 | 532 19 69-77 | Pan, Seat |
| 21 | 532 17 18-52 | Bolt, Shoulder 5/16-18 |

| KEY NO. | PART NO. | DESCRIPTION |
|---|---|---|
| 37 | 873 80 05-00 | Nut, Lock 5/16-18 unc |
| 40 | 532 19 76-61 | Handle Slide Seat |
| 41 | 532 19 82-00 | Spring Latch Seat |
| 43 | 874 76 06-12 | Bolt Fin Hex 3/8-16 unc x 3/4 |
| 44 | 819 13 38-12 | Washer 13/32 x 2-3/8 x 12 Ga. |

**NOTE:** All component dimensions given in U.S. inches
1 inch = 25.4 mm

## TRACTOR - - MODEL NO. PB26H54YT (96042012702), PRODUCT NO. 960 42 01-27
## DECALS

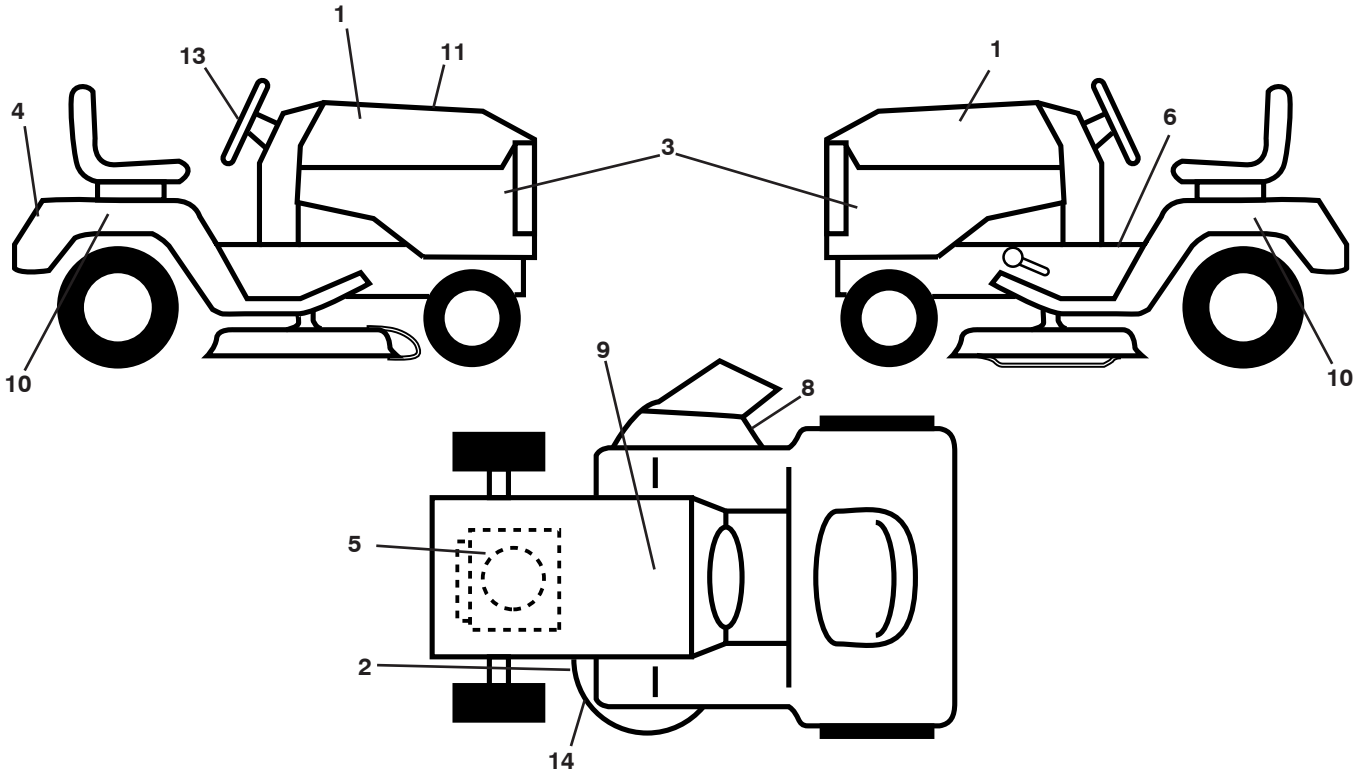


| KEY NO. | PART NO. | DESCRIPTION |
|---|---|---|
| 1 | 532 44 52-35 | Decal, Hood |
| 2 | 532 17 84-55 | Decal, Mower Caution |
| 3 | 532 44 52-32 | Decal, Side Panel |
| 4 | 532 44 52-34 | Decal, Fender |
| 5 | 532 43 50-97 | Decal, Eng H.P. |
| 6 | 532 41 16-57 | Decal, Fender Operator's |
| 8 | 532 17 05-63 | Decal, Warning |
| 9 | 532 14 50-05 | Decal, Battery Dnge/Poi |
| 10 | 532 43 84-92 | Decal, Fender SD RH |
| 11 | 532 43 84-29 | Decal, Replacement |
| 13 | 532 43 85-01 | Decal, Steering Wheel |
| 14 | 532 19 87-85 | Decal, Mower Schematic |
| - - | 532 40 95-07 | Pad, Footrest Control |
| - - | 532 16 69-60 | Decal, Bypass |
| - - | 532 40 95-05 | Pad, Footrest, LH |
| - - | 532 44 11-68 | Manual, Operator's (Eng/Span) |
| - - | 532 44 51-50 | Manual, Parts (Eng/Span) |

## WHEELS AND TIRES

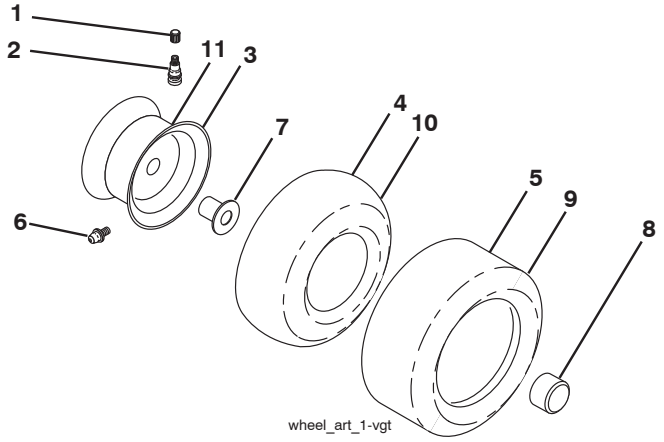


| KEY NO. | PART NO. | DESCRIPTION |
|---|---|---|
| 1 | 532 05 91-92 | Cap, Valve, Tire |
| 2 | 532 06 51-39 | Stem, Valve |
| 3 | 532 43 65-75 | Rim Assembly, Front |
| 4 | 532 05 99-04 | Tube, Front |
| 5 | 532 10 62-22 | Tire, Front |
| 6 | 532 12 49-57 | Fitting, Grease |
| 7 | 532 12 49-59 | Bearing, Flange |
| 8 | 532 17 50-39 | Cap, Axle |
| 9 | 532 13 84-68 | Tire, R. TS. 20 x 8-8 |
| 10 | 532 12 49-26 | Tube, Rear |
| 11 | 532 10 61-08 | Rim Assembly, Rear |
| - - | 532 14 43-34 | Sealant, Tire (Not Shown) |

**NOTE:** All component dimensions given in U.S. inches
1 inch = 25.4 mm

# LIMITED WARRANTY

The Manufacturer warrants to the original consumer purchaser that this product as manufactured is free from defects in materials and workmanship. For a period of two (2) years from date of purchase by the original consumer purchaser, we will repair or replace, at our option, without charge for parts or labor incurred in replacing parts, any part which we find to be defective due to materials or workmanship. This Warranty is subject to the following limitations and exclusions.

1. This warranty does not apply to the engine, transaxle/transmission components, battery (except as noted below) or components parts thereof. Please refer to the applicable manufacturer's warranty on these items.
2. Transportation charges for the movement of any power equipment unit or attachment are the responsibility of the purchaser. Transportation charges for any parts submitted for replacement under this warranty must be paid by the purchaser unless such return is requested by the manufacturer.
3. Battery Warranty: On products equipped with a Battery, we will replace, without charge to you, any battery which we find to be defective in manufacture, during the first ninety (90) days of ownership. After ninety (90) days, we will exchange the Battery, charging you 1/12 of the price of a new Battery for each full month from the date of the original sale. Battery must be maintained in accordance with the instructions furnished.
4. The Warranty period for any products used for rental or commercial purposes is limited to 90 days from the date of original purchase.
5. This Warranty applies only to products which have been properly assembled, adjusted, operated, and maintained in accordance with the instructions furnished. This Warranty does not apply to any product which has been subjected to alteration, misuse, abuse, improper assembly or installation, delivery damage, or to normal wear of the product.
6. Exclusions: Excluded from this Warranty are belts, blades, blade adapters, normal wear, normal adjustments, standard hardware and normal maintenance.
7. In the event you have a claim under this Warranty, you must return the product to an authorized service dealer.

Should you have any unanswered questions concerning this Warranty, please contact:

HOP
Outdoor Products Customer Service Dept.
9335 Harris Corners Parkway
Charlotte, NC 28269 USA

In Canada contact:
HOP
5855 Terry Fox Way
Mississauga, Ontario
L5V 3E4

giving the model number, serial number and date of purchase of your product and the name and address of the authorized dealer from whom it was purchased.

THIS WARRANTY DOES NOT APPLY TO INCIDENTAL OR CONSEQUENTIAL DAMAGES AND ANY IMPLIED WARRANTIES ARE LIMITED TO THE SAME TIME PERIODS STATED HEREIN FOR OUR EXPRESSED WARRANTIES. Some areas do not allow the limitation of consequential damages or limitations of how long an implied Warranty may last, so the above limitations or exclusions may not apply to you. This Warranty gives you specific legal rights, and you may have other rights which vary from locale to locale.

This is a limited Warranty within the meaning of that term as defined in the Magnuson-Moss Act of 1975.

# Poulan PRO

## PARTS AND SERVICE

This product has been expertly engineered and carefully manufactured to rigid quality standards. As with all mechanical products, some adjustments or part replacement may be necessary during the life of your unit.

For Parts and service, contact our authorized distributor: call 1-800-849-1297

- For replacement parts, have available the following information:
  a. Model Number/Manufacturer's I.D. Number
  b. Description of part.

For Technical Assistance: call 1-800-829-5886

For a Parts Manual, go to our website: www.poulanpro.com

**NOTE:** **HOP provides parts and service through its authorized distributors and dealers; therefore, all requests for parts and service should be directed to your local dealer(s). The philosophy of HOP is to continually improve all of its products. If the operating characteristics or the appearance of your product differs from those described in this Manual, please contact your local dealer for updated information and assistance.**